
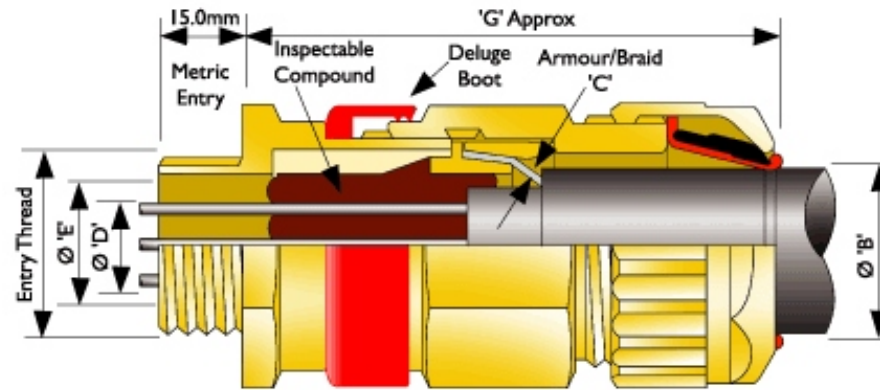


Hawke Cable Glands ICG 653 Universal

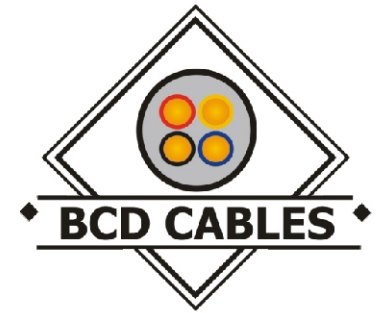

CABLE GLAND SELECTION TABLE

Size Ref.	Entry Thread Size		Cable Acceptance Details								'G' Compressed Length	Hexagon Dimensions	
			Inner Sheath / Cores			Outer Sheath 'B'		'C' Armour/Braid		Across Flats		Across Corners	
	Metric	IPT *		'D' Max. Over Cores	'E' Max. Inner Sheath	Max Ho. Of Cores	Min	Max	Orientation 1				Orientation 2
Os	M20	½"	-	8.9	10.0	6	5.5	12.0	0.9 / 1.25	0 / 0.7	72.8	24.0	27.7
O	M20	½"	-	8.9	10.0	6	9.5	16.0	0.9 / 1.25	0 / 0.7	72.8	24.0	27.7
A	M20	¾"	½"	11.0	12.5	10	12.5	20.5	0.9 / 1.25	0 / 0.7	73.8	30.0	34.6
B	M25	1"	¾"	16.2	18.4	21	16.9	26.0	1.25 / 1.6	0 / 0.7	78.1	36.0	41.6
C	M32	1¼"	1"	21.9	24.7	42	22.0	33.0	1.6 / 2.0	0 / 0.7	83.0	46.0	53.1
C2	M40	1½"	1¼"	26.3	29.7	60	28.0	41.0	1.6 / 2.0	0 / 0.7	84.1	55.0	63.5
D	M50	2"	1½"	37.1	41.7	80	36.0	52.6	1.8 / 2.5	0 / 1.0	91.3	65.0	75.1
E	M63	2½"	2"	47.8	53.3	100	46.0	65.3	1.8 / 2.5	0 / 1.0	101.8	80.0	92.4
F	M75	3"	2½"	59.0	66.2/65.3 ¹	120	57.0	78.0	1.8 / 2.5	0 / 1.0	101.2	95.0	109.6

¹ Smaller value is applicable when selecting the option NPT entry thread.
 All Metric entry threads are 1.5mm pitch medium fit. All dimensions in millimeters. (except*).
 # Dedicated armour clamping rings are fitted. Please specify armour type and size.
 Two part sealing compound and assembly instructions are supplied with the cable gland.
[Alternative reversible armour clamping ring \(RAC\) details.](#)



www.bcd-cables.com



T: +44 1493 604604 F: +44 1493 60466 E: sales.bcd@etechcentre.com